


DPL198

TAKTON

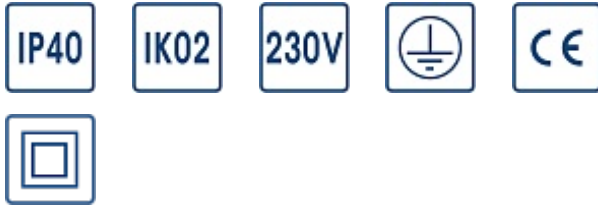

Benefits:

- Operational cost savings, up to 60% savings
- Appealing, uniform luminous surface solution
- Best suited for offices
- Meeting office standards for low UGR
- Ultra Slim square housing
- Stylish design
- Low flicker level (less than 5%)
- Efficacy up to 121 lm/W on module level
- Good quality of light (CRI >80)
- Available in 60x60, 30x120, 60x120
- 5 year system warranty

TYPE	Product type: DPL 198
FUNCTIONALITY	Optical cover: Microprismatic polycarbonate diffuser Color Rendering Index (CRI): > 80 Light source: LED module Ceiling type: Exposed T-bar ceiling Managing: Fixed output as standard, DALI or Casambi optional

ELECTRICAL PARAMETERS	<p>Driver efficiency nominal: 0,95</p> <p>Electrical isolation class IEC: II</p> <p>Input Frequency: 50-60 Hz</p> <p>Power factor nominal: 0,95</p> <p>Input voltage: 220 – 240 V</p> <p>Power consumption: 32 W</p>
MECHANICAL PARAMETERS	<p>Ingress protection: Individual: lay-in in exposed ceiling grids; suspended</p> <p>Impact resistance: IK02</p> <p>Installation: Individual: lay-in in exposed ceiling grids; suspended</p> <p>Net weight piece: 2,2 kg</p> <p>Body material: Aluminum profile</p> <p>Color: White</p>
OVERTIME PERFORMANCE	<p>Driver service life time @10% failures: 50 000</p> <p>Initial system efficacy: up to 110 Lm/W</p> <p>Luminous flux system tolerance: +/- 3%</p> <p>Median useful life of LED source: M70F50 life > 50 000 hours</p> <p>Power consumption tolerance: +/- 2%</p>
ENVIROMENTAL CONDITIONS	<p>Ambient temperature range: -10°C to +45 °C</p>

GENERAL INFORMATION

Flammability:

Full-fill TPa requirements

Warranty period:

5 years

CE mark:

CE mark

ROHS mark:

ROHS mark

Application:

- Offices
- Open-plan
- Meeting rooms
- Cell offices
- Circulation areas
- Healthcare
- Hospitality

PRODUCT FAMILY RANGE

Code	Type	Dimensions, mm	Power, W	Initial luminous flux	Color, K	Ripple	UGR	Diffuser
700151454005	DPL198 6060 LED038 35W MP PC 840	600x600	35	3750	4000	<5%	<19	Microprismatic
700151454008	DPL198 6060 LED038 35W MP PC 865	600x600	35	3750	6500	<5%	<19	Microprismatic
700151454010	DPL198 6060 LED036 35W MP PC 830	600x600	35	3550	3000	<5%	<19	Microprismatic
700151454045	DPL198 30120 LED038 35W MP PC 840	300x120	35	3750	4000	<5%	<19	Microprismatic
700151454046	DPL198 30120 LED038 35W MP PC 865	300x120	35	3750	6500	<5%	<19	Microprismatic
700151454047	DPL198 30120 LED036 35W MP PC 830	300x120	35	3550	3000	<5%	<19	Microprismatic
700151454048	DPL198 60120 LED070 62W MP PC 840	600x120	62	7000	4000	<5%	<19	Microprismatic
700151454049	DPL198 60120 LED070 62W MP PC 865	600x120	62	7000	6500	<5%	<19	Microprismatic

DPL198

TAKTON

700151454050	DPL198 60120 LED066 62W MP PC 830	600x120	62	6600	3000	<5%	<19	Microprismatic
700151454051	DPL198 6060 LED038 35W MP PC 840 TPA	600x600	35	3750	4000	<5%	<19	Microprismatic
700151454052	DPL198 6060 LED036 35W MP PC 830 TPA	600x600	35	3550	3000	<5%	<19	Microprismatic
700151454053	DPL198 30120 LED038 35W MP PC 840 TPA	300x120	35	3750	4000	<5%	<19	Microprismatic
700151454054	DPL198 30120 LED036 35W MP PC 830 TPA	300x120	35	3550	3000	<5%	<19	Microprismatic

Accessories

EOC	Description
700456	Suspension rope kit for LED panel