




The installation should be carried out by an electrician or by any similarly qualified person.



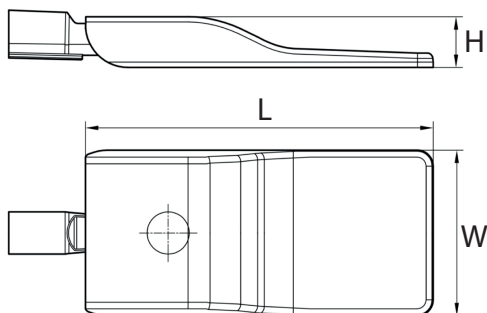


DKS 674 - 407.95x242x75.14 (LxWxH)


DKS 675 - 536.60x257x81,40 (LxWxH)

Net weight, no more / Nettopaino, ei enää / Nettovikt, inte mer:
DKS674 - 4,5kg, DKS675 - 6,5kg


15 Nm

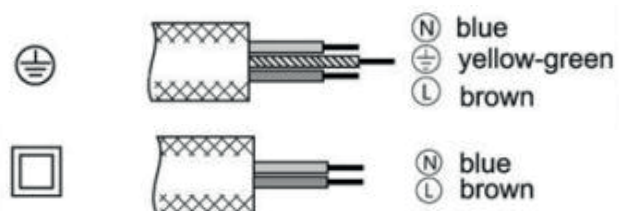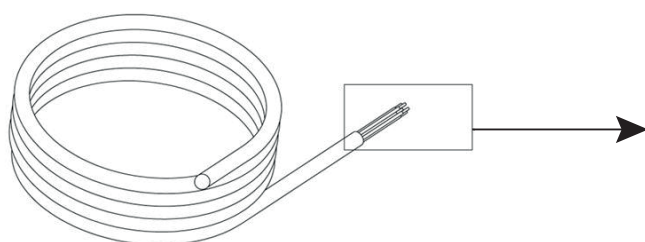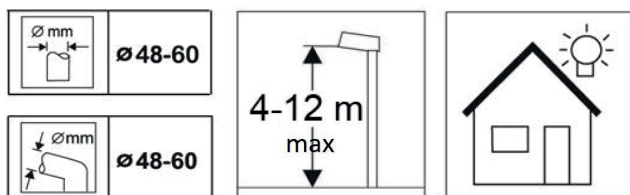

Constant Light Output/ Vakio valoteho/ Konstant ljusutgång

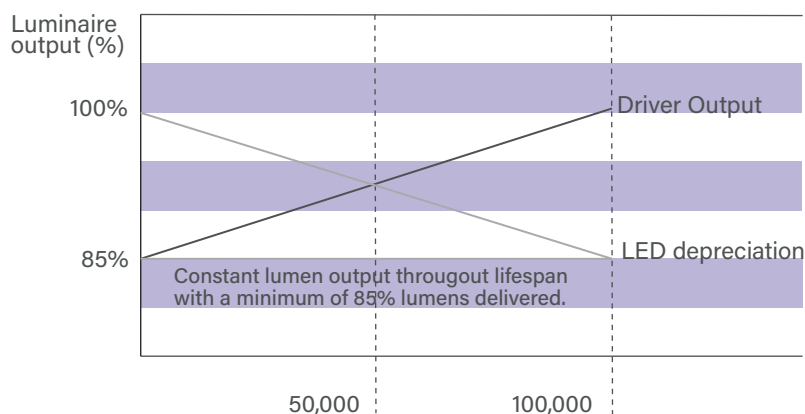

Auto dimming/ Automaattinen himmennys/ Automatisk dimming - Dynadimmer

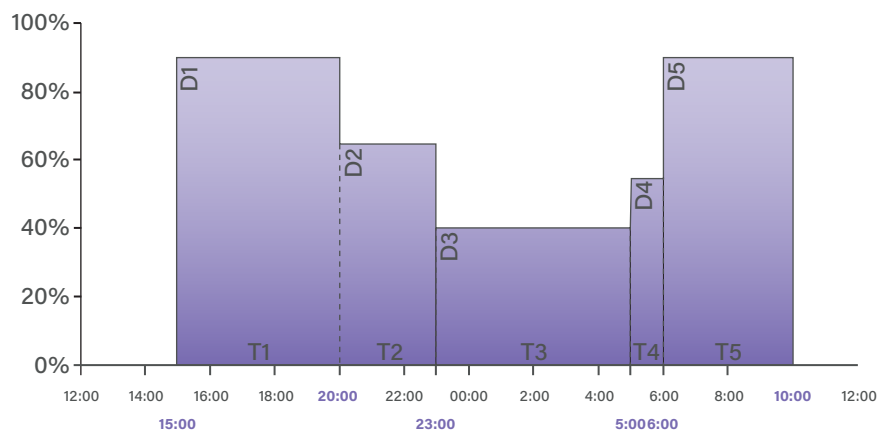

CAUTION

RISK OF BURN INJURIES

During and after use the unit may be hot. Do not touch the unit before it has completely cooled down.

Failure to follow these instructions can result in minor injuries, or equipment damage.

Led modules can be replaced by manufacturer only/ Led-moduulit voidaan korvata vain valmistajalla/ Ledda moduler kan endast bytas ut av tillverkaren.

Windage area, no more/ Tuuletusalue, ei enää/ Vindkraft område, inte mer:

DKS674 - 0,14m² above/below/ylhäälä/alhaala/ovan/nedan and/ja/och 0,042m² side position/sivupaikassa/sidposition

DKS675 - 0,18m² above/below/ylhäälä/alhaala/ovan/nedan and/ja/och 0,055m² side position/sivupaikassa/sidposition