

VIKING GEN. 2

INSTALLATION INSTRUCTIONS ANLEITUNG D'INSTALLATION

TAKTON

IP66

IK09

230V




RoHS

LED

!




The installation should be carried out by an electrician
or by any similarly qualified person.

!

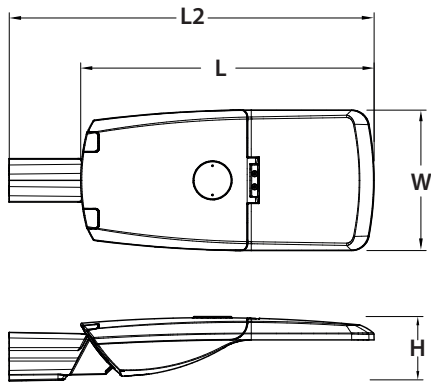


DKS 850 A size - 501 x 240 x 624 x 108 (LxWxL2xH)
DKS 850 B size - 602 x 301 x 724 x 113 (LxWxL2xH)
DKS 850 C size - 703 x 313 x 824 x 115 (LxWxL2xH)

15 Nm

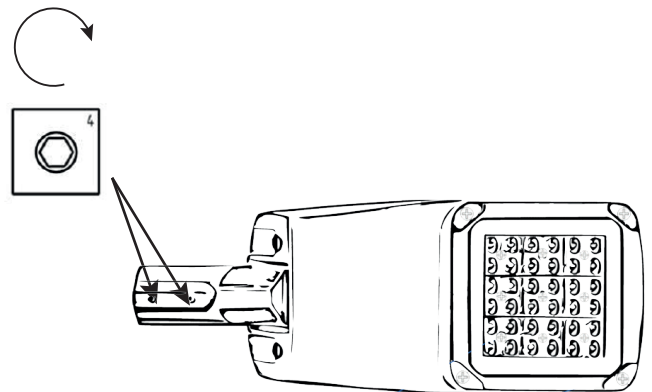


1. POST-TOP OR SIDE ENTRY INSTALLATION ADJUSTMENT
2. PAN ADJUSTMENT

1

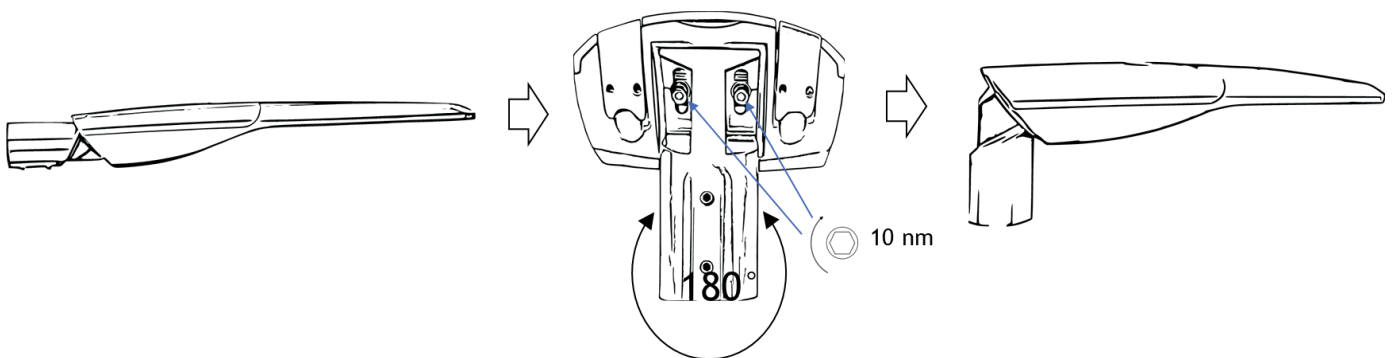

2

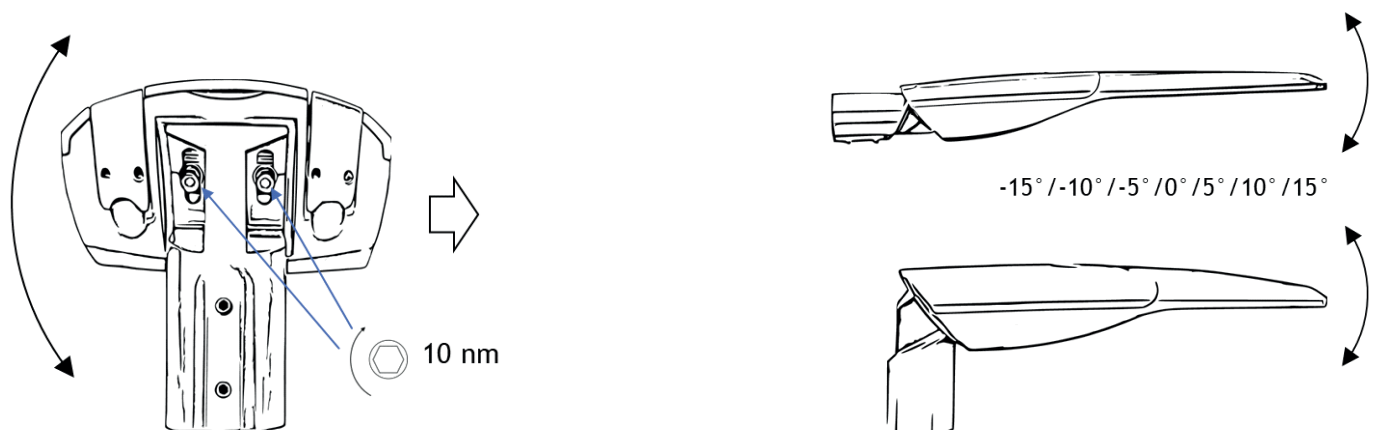

INSTALLATION INSTRUCTIONS ANLEITUNG D'INSTALLATION

Luminaire Type	Weight	Wind force area - top	Wind force area - side
DKS850 size A	5,30 kg	0,132 m ²	0,020 m ²
DKS850 size B	6,60 kg	0,193 m ²	0,049 m ²
DKS850 size C	9,90 kg	0,221 m ²	0,053 m ²

ENERGY CLASS DEPENDING ON OPTIC AND LIGHT COLOR:

Type of optic	1800K	2700K	3000K	4000K
NB1,NB2,NB3,AST4	D	C	C	B
WB	D	D	D	C

NUMBER OF LUMINAIRES ON MCB (MAX)

Power	Number of luminaires on MCB (max)			
	B10	B16	C10	C16
17W - 22W	28	48	29	81
26W - 34W	22	32	23	54
52W - 105W	6	10	7	17
105W - 170W	5	7	6	11
175W - 204W		5	-	8


PRE - INSTALLED CABLE RANGE

EOC	Description	Size	Length,m
C1-5x1.5	Rubber cable H05RR-F	5x1,5	1
C2-5x1.5	Rubber cable H05RR-F	5x1,5	2
C3-5x1.5	Rubber cable H05RR-F	5x1,5	3
C4-5x1.5	Rubber cable H05RR-F	5x1,5	4
C5-5x1.5	Rubber cable H05RR-F	5x1,5	5
C6-5x1.5	Rubber cable H05RR-F	5x1,5	6
C7-5x1.5	Rubber cable H05RR-F	5x1,5	7
C8-5x1.5	Rubber cable H05RR-F	5x1,5	8
C9-5x1.5	Rubber cable H05RR-F	5x1,5	9
C10-5x1.5	Rubber cable H05RR-F	5x1,5	10
C11-5x1.5	Rubber cable H05RR-F	5x1,5	11
C12-5x1.5	Rubber cable H05RR-F	5x1,5	12
C1-3x1.5	Rubber cable H05RR-F	3x1.5	1
C2-3x1.5	Rubber cable H05RR-F	3x1.5	2
C3-3x1.5	Rubber cable H05RR-F	3x1.5	3
C4-3x1.5	Rubber cable H05RR-F	3x1.5	4
C5-3x1.5	Rubber cable H05RR-F	3x1.5	5
C6-3x1.5	Rubber cable H05RR-F	3x1.5	6
C7-3x1.5	Rubber cable H05RR-F	3x1.5	7
C8-3x1.5	Rubber cable H05RR-F	3x1.5	8
C9-3x1.5	Rubber cable H05RR-F	3x1.5	9
C10-3x1.5	Rubber cable H05RR-F	3x1.5	10
C11-3x1.5	Rubber cable H05RR-F	3x1.5	11
C12-3x1.5	Rubber cable H05RR-F	3x1.5	12


INSTALLATION INSTRUCTIONS ANLEITUNG D'INSTALLATION

VERSION W/O CABLE – ENTRY CABLE CONNECTION/
VERSION OHNE KABEL – EINGANG KABELANSCHLUSS/
VERSION SANS CÂBLE – ENTRÉE CONNEXION DE CÂBLE


220-240V AC ISOLATION CLASS II

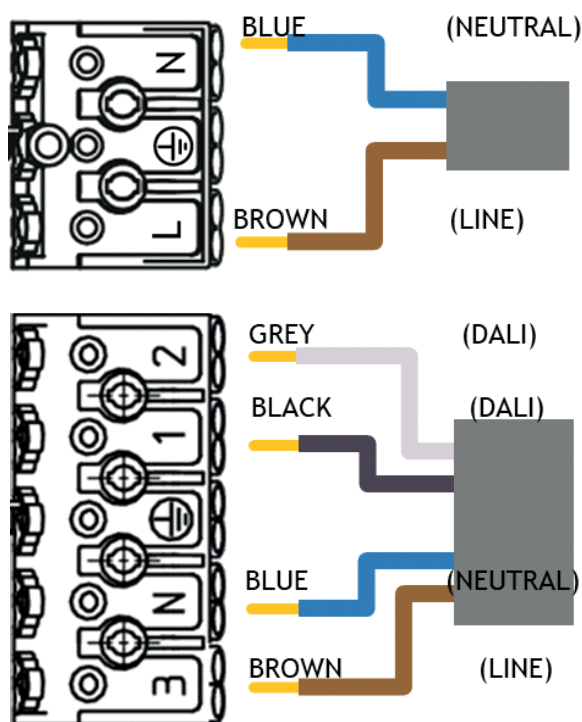

220-240V AC ISOLATION CLASS I

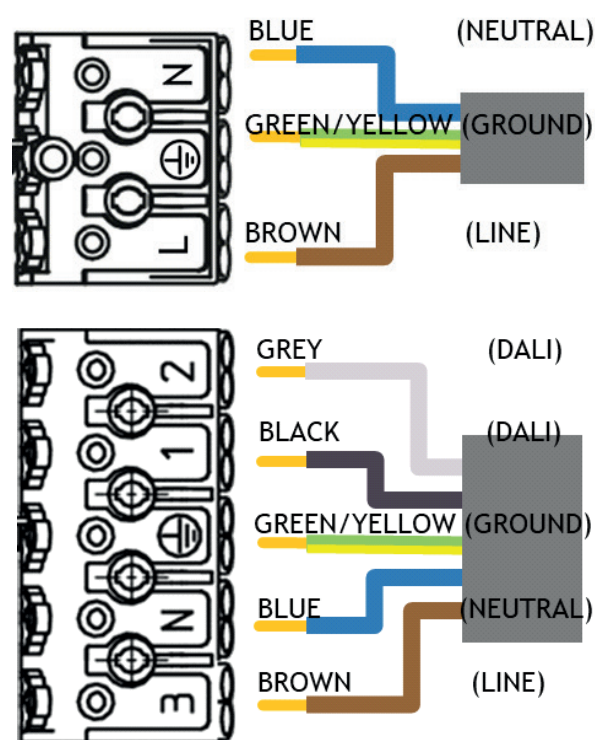

VERSION WITH CABLE & IP68 CONNECTOR
VERSION MIT KABEL UND IP68-STECKER
VERSION AVEC CÂBLE ET CONNECTEUR IP68

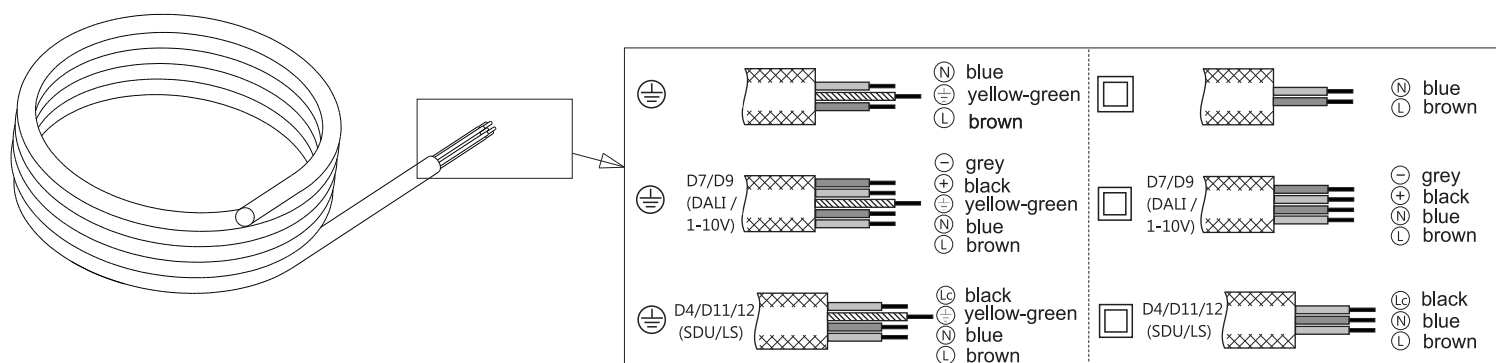

DISPOSAL / ENTSORGUNG/ÉLIMINATION

EN The lamp is assembled without glue.

For disposal: remove the seal and the wires from the connectors; unscrew the screws that secure the glass, LED modules and driver(s); unscrew the cable entry gland.

DE Die Leuchte ist ohne Klebstoff zusammengebaut.

Zur Entsorgung: die Dichtung und die Drähte von den Anschlüssen entfernen; die Schrauben zur Befestigung des Glases, der LED-Module und der Treiber abschrauben; die Kabeleinführungsstutzen abschrauben

FR La lampe est assemblée sans colle.

Pour l'élimination : retirer le joint et les fils des connecteurs ; dévisser les vis qui fixent le verre, les modules LED et le(s) driver(s); dévisser le presse-étoupe.